


### **Temporary Roof Mounted Crane/ SQP 3.**



Each Crane was fitted with two double reeved 1000Kg hoists, one primary & one as back-up.  
The cranes used the existing access machines tracks for support and traversing.



To install the two cranes the first crane was raised in component form using an auxiliary hoist, this crane was assembled and used to lift the second crane into place: A rigging scaffolding was first erected to be used for high level assembly.

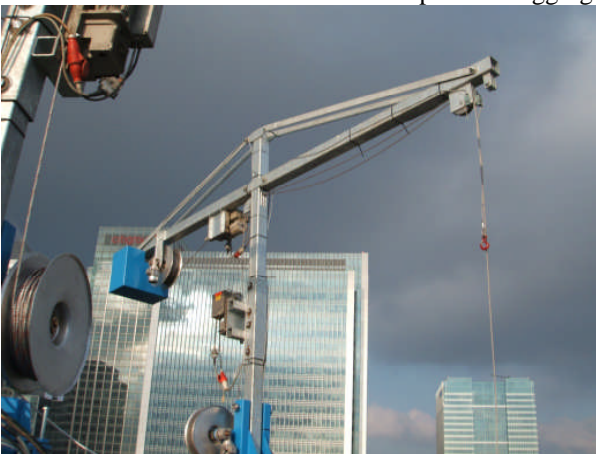

Once installed both cranes were used in tandem to lift and lower the large air conditioning units. Once the job was completed all hoists and electrical equipment were removed leaving the crane mast and jib to be removed at a later date.



ACCESS - LIFTING - PULLING & SAFETY  
[www.alps-uk.com](http://www.alps-uk.com)